

# SUMISANSUI<sup>®</sup> MARK II


Best irrigation tubes for the open field crops and nurseries



**No.1** in quality  
**No.1** trusted brand  
**No.1** in Malaysia & Indonesia  
since 1987



*Sole Distributor Malaysia & Indonesia*




**T & C Indomal Sdn. Bhd.** (665681W)

128, Jalan Kubu, 75300 Malacca, Malaysia.  
Tel : +606 282 2560 , 283 2808 , 282 9798 , 284 7450  
Fax : +606 292 5776 , 283 2520  
Email : tncim@myjaring.net  
Website : www.tncindomal.com

# SUMISANSUI<sup>®</sup> MARK II

Attention for the use

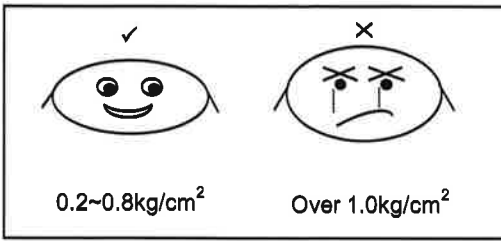

- The suitable water pressure for SUMISANSUI MARK II is 0.2-0.8kg/cm<sup>2</sup>. Excessive water pressure may damage the tube.
- Use filter to reduce tube clogging.
- Discharge sludges from the tube periodically for trouble free irrigation
- Use Sumisansui End Stopper to enhance performance.

## Specifications



Items	Specifications
Tube width (flattened)	50mm
Standard water feed rate	130-480cc/min m
Material	Special polyethylene
Tube unit length	100 m/roll
Packing	5 rolls

## Water feed rate (cc/min m)

Tube length \ Water pressure	30m	50m	100m
0.2 kg/cm <sup>2</sup>	200	180	130
0.8 kg/cm <sup>2</sup>	480	440	340


## Water pressure and irrigation range

For good coverage maximum tube interval is 3.6m (12 ft) apart in oil palm nursery

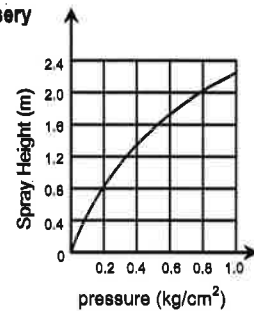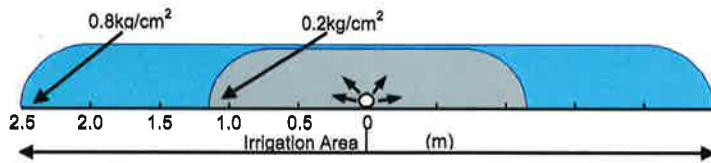

## LAYOUT FOR OIL PALM MAIN NURSERY

### 10 HA LAYOUT

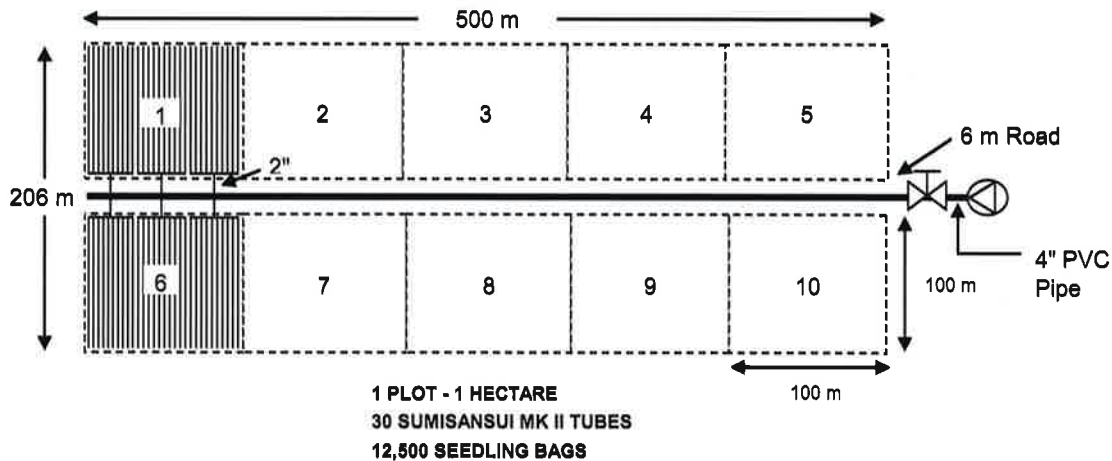

Manufacturer;



SUMIKA AGROTECH CO., LTD., JAPAN

Product of;



SUMITOMO CHEMICAL, JAPAN